





# Eme

Piedra mediterránea Cerámica





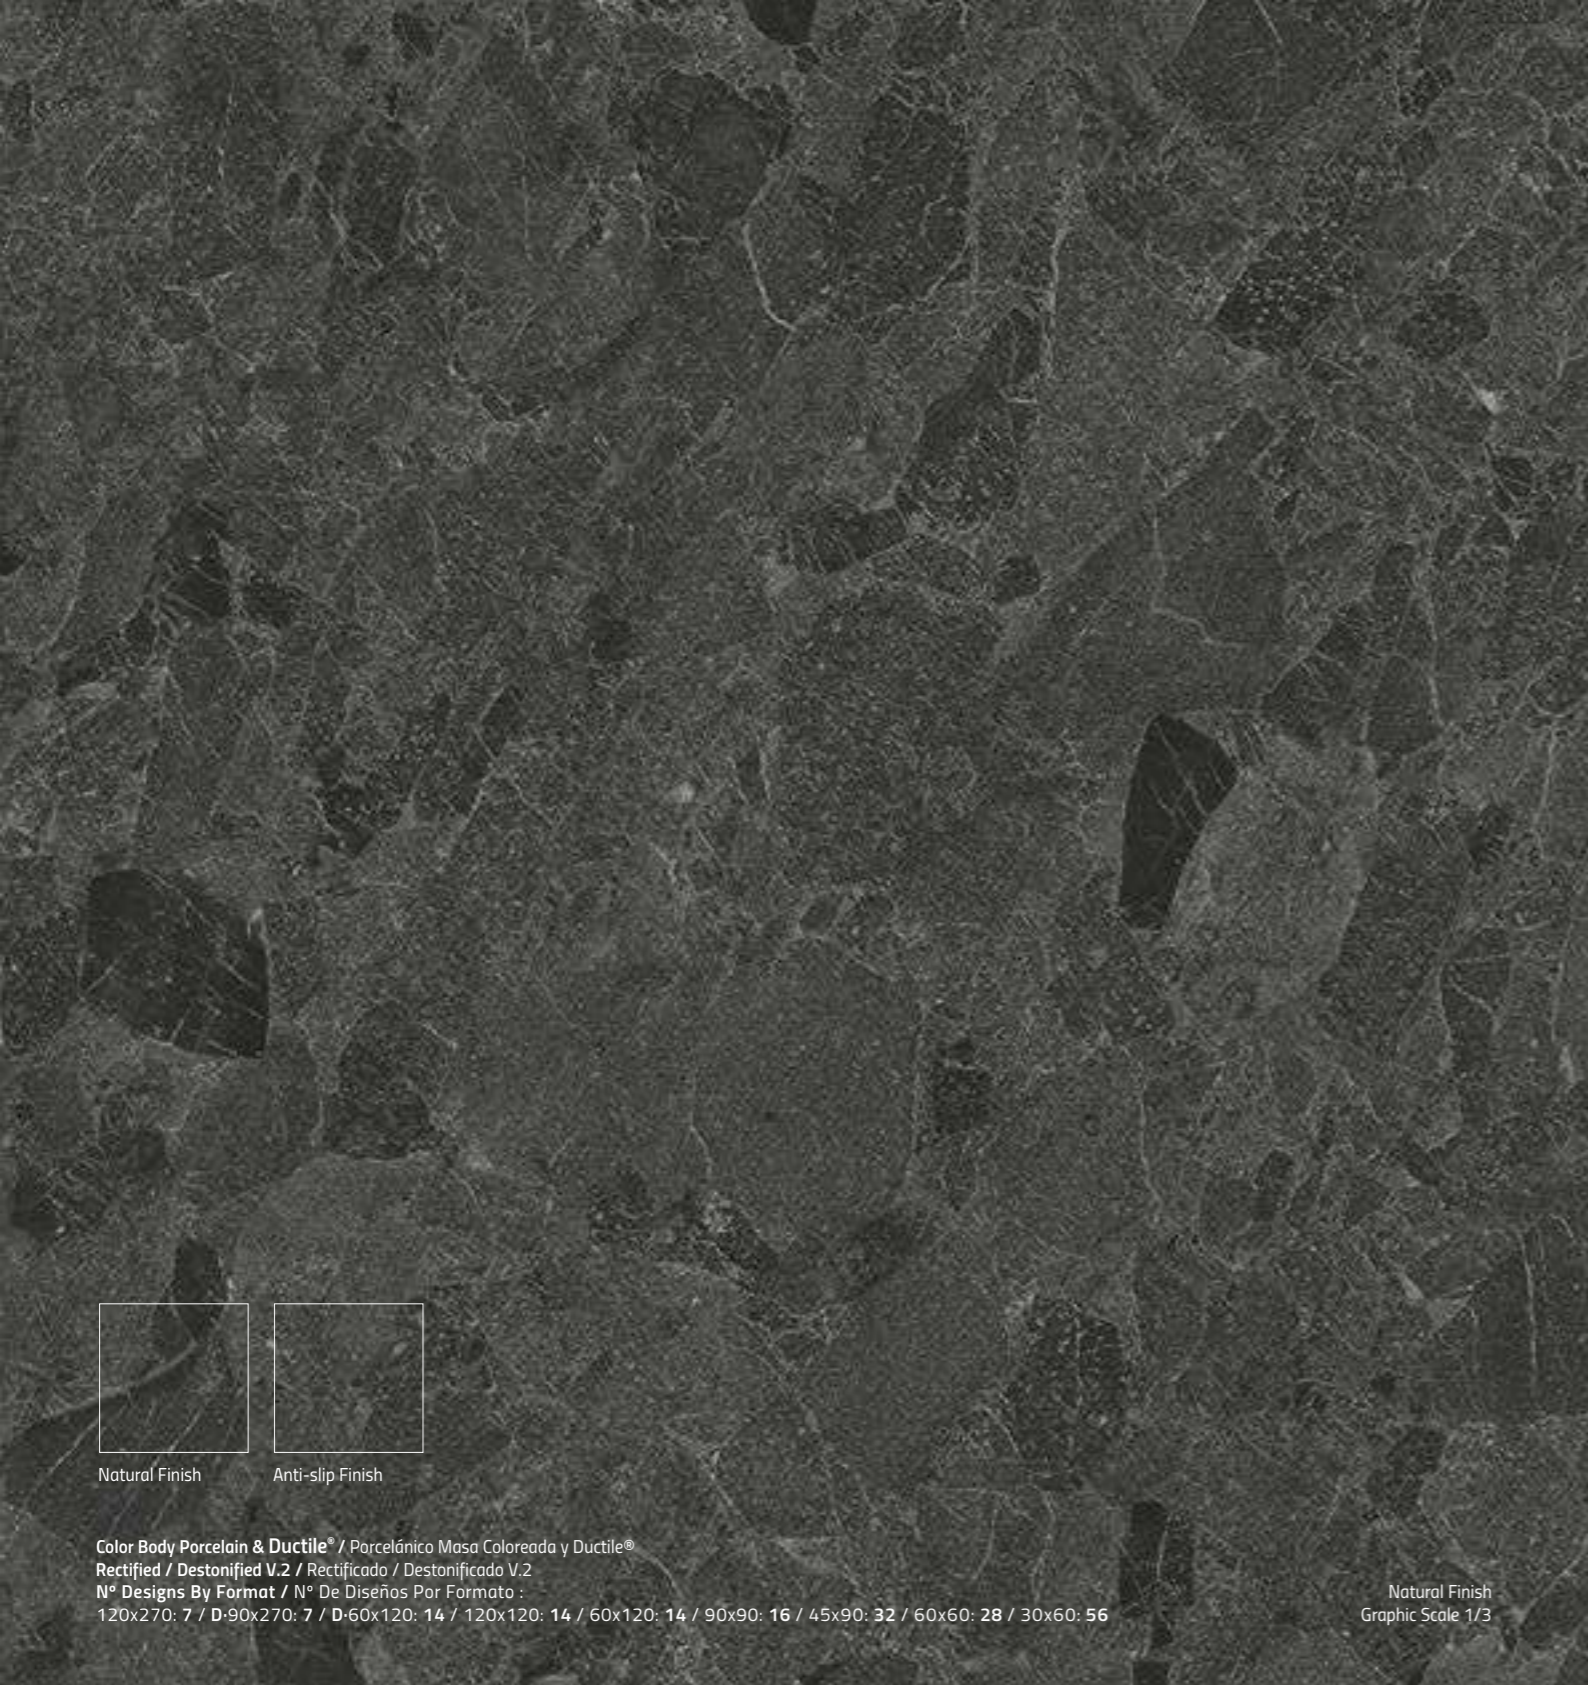


Natural Finish      Anti-slip Finish

Color Body Porcelain & Ductile® / Porcelánico Masa Coloreada y Ductile®  
Rectified / Destonified V.2 / Rectificado / Destonificado V.2  
N° Designs By Format / N° De Diseños Por Formato :  
120x270: 7 / D-90x270: 7 / D-60x120: 14 / 120x120: 14 / 60x120: 14 / 90x90: 16 / 45x90: 32 / 60x60: 28 / 30x60: 56


Natural Finish  
Graphic Scale 1/3

Available Colours:

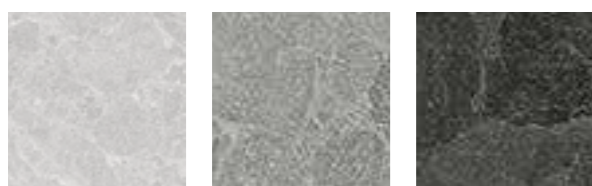

Eme Light Grey      Eme Grey      Eme Anthracite

Available Sizes / Formatos Disponibles

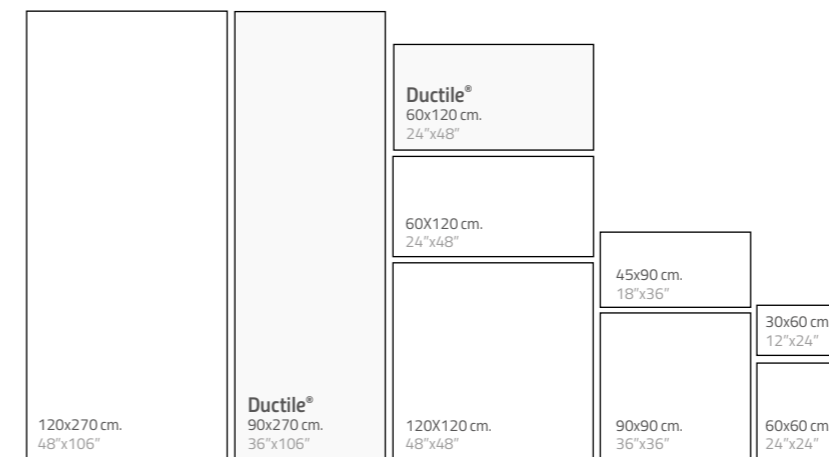

Complements / Complementos



Available Sizes & Finishes / Formatos y Acabados Disponibles

Nominal Size Formato Nominal	Real Size Formato Real	Natural Natural C1 · R9 · CA	Anti-Slip Antideslizante C3 · R11 · CC	Price Code Código Precio	Pz/Box	M2/Box	Kg/Box	Box/Pa	M2/Pa	Kg/Pa
30x60 cm. 12"x24"	29,8x59,8x0,9 cm.	●	●	30	6	1,07	22,00	48	51,36	1094
60x60 cm. 24"x24"	59,8x59,8x0,9 cm.	●	●	60	3	1,07	23,22	40	42,91	962
45x90 cm. 18"x36"	44,8x89,8x0,9 cm.	●	●	45	3	1,21	25,50	32	38,62	849
90x90 cm. 36"x36"	89,8x89,8x0,9 cm.	●	●	90	1	0,81	17,00	44	35,42	796
*90x90x2 cm. 36"x36"	89,8x89,8x2 cm.	●	●	94	1	0,81	37,09	24	19,32	946
60x120 cm. 24"x48" <b>Ductile®</b>	59,8x119,8x0,9 cm.	●	●	62	2	1,43	30,32	24	34,32	767
60x120 cm. 24"x48"	59,8x119,8x0,6 cm.	●	●	620	3	2,16	25,80	24	51,84	649
120x120 cm. 48"x48"	119,8x119,8x0,9 cm.	●	●	120	1	1,44	30,50	30	43,06	974
*120x120x2 cm. 48"x48"	119,8x119,8x2 cm.	●	●	121	1	1,44	66,02	16	22,96	1140
<b>Ductile®</b> 90x270 cm. 36"x106"	89,8x269,8x0,6 cm.	●	●	970	1	2,42	29,04	24	58,08	801
120x270 cm. 48"x106"	119,8x269,8x0,6 cm.	●	●	276	1	3,23	45,50	24	77,52	1250
Mosaic 1" x 1"	29,8x29,8x0,9 cm.	●	●	25	5	0,44	9,00	60	26,40	576
Mosaic 2" x 2"	29,8x29,8x0,9 cm.	●	●	55	5	0,44	9,00	60	26,40	576
Mureto Mosaic	29,8x29,8x0,9 cm.	●	●	300	5	0,44	9,00	40	17,60	395

Nominal Size Formato Nominal	Real Size Formato Real	Natural Natural C1 · R9 · CA	Anti-Slip Antideslizante C3 · R11 · CC	Price Code Código Precio	Pz/Box	ML/Box	Kg/Box	Box/Pa	M2/Pa	Kg/Pa
Skirting / Rodapié 5x60 cm.	4,8x59,8x0,9 cm.	●	●	561	5	2,99	3,00	120	-	-
Skirting / Rodapié 5x90 cm.	4,8x89,8x0,9 cm.	●	●	591	5	4,49	5,50	70	-	-
Skirting / Rodapié 5x120 cm.	4,8x119,8x0,9 cm.	●	●	521	5	5,99	7,00	70	-	-
Step Tile / Peldaño 33,3x60 cm.	33,3x59,8 cm.	●	●	360	2	1,20	-	-	-	-
Step Tile / Peldaño 33,3x90 cm.	33,3x89,8 cm.	●	●	390	2	1,80	-	-	-	-
Step Tile / Peldaño 33,3x120 cm.	33,3x119,8 cm.	●	●	792	2	2,40	-	-	-	-
Corner Step Tile /P.Ang. 33,3x60 cm.	33,3x59,8 cm.	●	●	361	1	0,60	-	-	-	-
Corner Step Tile /P.Ang. 33,3x90 cm.	33,3x89,8 cm.	●	●	391	1	0,90	-	-	-	-
Corner Step Tile /P.Ang. 33,3x120 cm.	33,3x119,8 cm.	●	●	822	1	1,20	-	-	-	-

\*Check Available Colours  
\*Consultar Colores Disponibles

## TECHNICAL INFORMATION

### STANDARD UNE/EN 14411:2016

DRY PRESSED CERAMIC TILES WITH WATER ABSORPTION LOWER THAN 0,5%

Rectified porcelanic

Reference: **EME LIGHT GREY, GREY, ANTHRACITE**

Format:

Thickness: 9 mm

Standard	Features	Required Value	Value
Normativas	Características	Valores Requeridos	Valor
EN-ISO 10545 / 3	Water absorption / Absorción de agua	Group BIa / E < 0,5 %	E < 0,5 %
EN-ISO 10545 / 4	Breaking strength / Resistencia a rotura	> 1300 N	> 2500 N
EN-ISO 10545 / 4	Bending strength / Resistencia a la flexión	> 35 N/mm <sup>2</sup>	> 52 N/mm <sup>2</sup>
EN-ISO 10545 / 6	Resistance to deep abrasion / Resistencia abrasión profunda	< 175 mm <sup>3</sup>	< 109 mm <sup>3</sup> Complies with / Cumple
EN-ISO 10545 / 11	Crazing resistance / Resistencia al cuarteo	Required / Exigida	Complies with / Cumple
EN-ISO 10545 / 12	Frost resistance / Resistencia a la helada	Required / Exigida	Complies with / Cumple
EN-ISO 10545 / 13	Chemical resistance: acids and alkalis / Resistencia química: ácidos y álcalis	Indicated by the manufacturer / Indicado por el fabricante	GLA/GHA Complies with / Cumple
EN-ISO 10545 / 13	Chemical resistance: domestic cleaning products and swimming pool salts / Resistencia química: productos de limpieza doméstica y sales para piscina	Min. GB	GA
EN-ISO 10545 / 14	Stain resistance / Resistencia a las manchas	Min. Clase 3	Clase 5
EN-ISO 10545 / 2	Surface quality / Calidad de la superficie	Min. 95% of tiles without defect / 95% de los azulejos sin defecto	Min. Guaranteed / Garantizado
UNE ENV 12633	Slip Resistance (Pendulum Test) / Antideslizamiento (Test del péndulo)	Min. Clase 1 Min. Clase 3	Clase 1 Natural Clase 3 Anti-Slip
DIN 51130	Critical Angle of Sliding (Inclined Platform) / Ángulo Crítico de Deslizamiento (Plataforma Inclinada)	Min. R9 Min. R11	R9 Natural R11 Antislip
DIN 51097	Critical Angle of Sliding (Wet Areas of Barefoot Walking) / Ángulo Crítico de Deslizamiento (Zonas Húmedas de Andar Descalzo)	Min. Class A Min. Class C	Class A Natural Class C Anti-Slip
UNE EN 13501-1:2002	Fire Reaction Test / Test reacción al fuego		A1 / A1FL
VOC	Do not release volatile elements / No desprende elementos volátiles		

STANDARD INTERNATIONAL ISO 9001  
QUALITY MANAGEMENT INTERNATIONAL STANDARD OBTAINED IN 2015.



GREEN BUILDING COUNCIL MEMBERSHIP

