


MAXIMUM SLABS

BY SAMMY'S DESIGNER FLOORING



TECHNICAL SPECIFICATIONS			
	Flatness (centre curvature / edge curvature / warpage)	ISO-10545-2	±0,5%
	Amount of water absorbed, in percentage	ISO-10545-3	E<0,5%
	Breaking strength	ISO-10545-4	≥2500 N
	Resistance to deep abrasion	ISO-10545-6	<175mm ³
	Fire Reaction Test	UNE EN 13501-1:2002	
	Frost resistance	ISO-10545-12	
	Release of hazardous substances	Does not release VOCs	

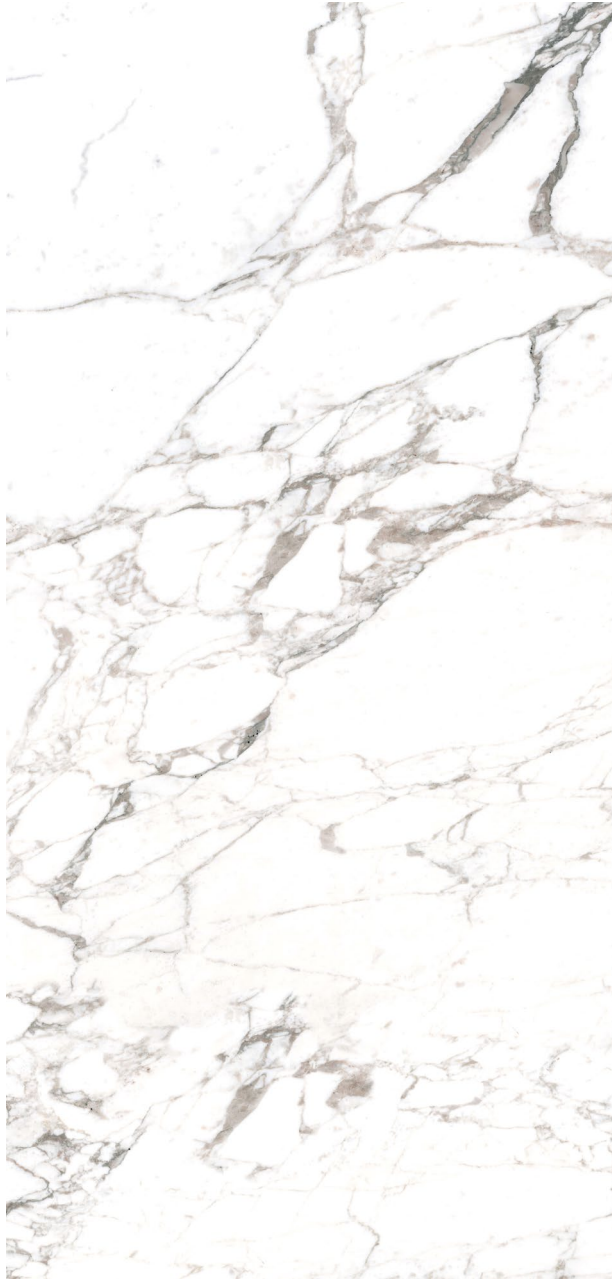

CALACATTA EXTRA

160x320 glossy SKU#: SLACALEXTP160320

160x320 matte SKU#: SLACALEXTM160320

118x278 glossy SKU#: SLACALEXTP118278

118x278 matte SKU#: SLACALEXTM118278

6 mm 1/4" ↑ ↓

6.5 mm 1/4" ↑ ↓

Stock

Custom Order

Surface	160x320 63"x126"	118x278 46"x109"	118x258 46"x101"	118x118 46"x46"	60x118 23"x46"
glossy	Stock	Stock	Custom Order	Custom Order	Custom Order
honed	Stock	Stock	Custom Order	Custom Order	Custom Order

*all sizes approximate