






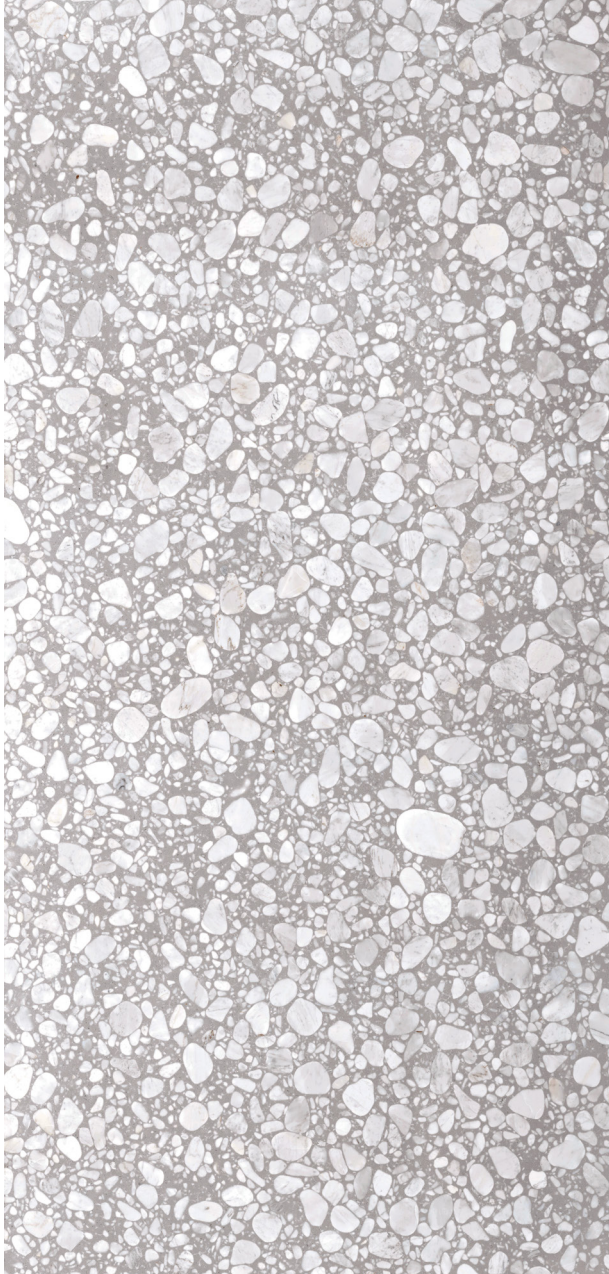


MAXIMUM SLABS

BY SAMMY'S DESIGNER FLOORING



TECHNICAL SPECIFICATIONS			
	Flatness (centre curvature / edge curvature / warpage)	ISO-10545-2	±0,5%
	Amount of water absorbed, in percentage	ISO-10545-3	E<0,5%
	Breaking strength	ISO-10545-4	≥2500 N
	Resistance to deep abrasion	ISO-10545-6	<175mm ³
	Fire Reaction Test	UNE EN 13501-1:2002	
	Frost resistance	ISO-10545-12	
	Release of hazardous substances	Does not release VOCs	



MACRO GRIGIO









118x278 glossy SKU#: SLAMACGRIP118236

6.5 mm 1/4" ↑ ↓

10 mm 3/8" ↑ ↓

Stock

Custom Order

Surface	118x236 46"x92"	118x118 46"x46"	59x118 23"x47"	59x59 23"x23"
glossy				
honed				

*all sizes approximate