




## FICHA TÉCNICA

### Technical Data Sheet

Mármol en acabado pulido  
Polished marble finish

60 X 120 CM.  
24 X 48 IN.

Porcelanato esmaltado. Rectificado.  
Glazed porcelain tile. Rectified.



12 Caras  
12 Faces



PEI 4  
Alto Tráfico  
High Traffic



Variación Alta  
High Variation



100%  
Pasta Blanca  
White body

### Uso Usage



Interior  
Interior



Baño  
Bathroom



Cocina  
Kitchen

**Porcelanato pulido** / Polished porcelain tile

**Características técnicas** / Technical specifications

	Pasta blanca / White body		
	Separación de boquilla / Grout size	2 mm	
	PEI	4	
	Resistencia química / Chemical resistance	Conforme	ASTM C650
	DCOF / Dynamic Coefficient of Friction	>0.42	ASTM C1028
	Absorción de agua / Water absorption	≤0.5%	ASTM C373
	MOHS	5-8	ASTM C1028
	Resistencia de flexión / Breaking strength	>350 kg	ISO 10545-4
	Shock térmico / Thermal shock resistance	Conforme	ASTM C484
	Resistencia a helada / Frost resistance	Conforme	ASTM C1026
	Resistencia a manchas / Stain resistance	Conforme	ASTM C1378
	Resistencia de abrasión / Abrasion resistance	Conforme	ANSI A137




Información de Embalaje

PZS-CAJA / PCS-BOX  
2

M<sup>2</sup>-CAJA / FT<sup>2</sup>-BOX  
1.44 / 15.50

KG-CAJA / LBS-BOX  
29.50 / 65.03

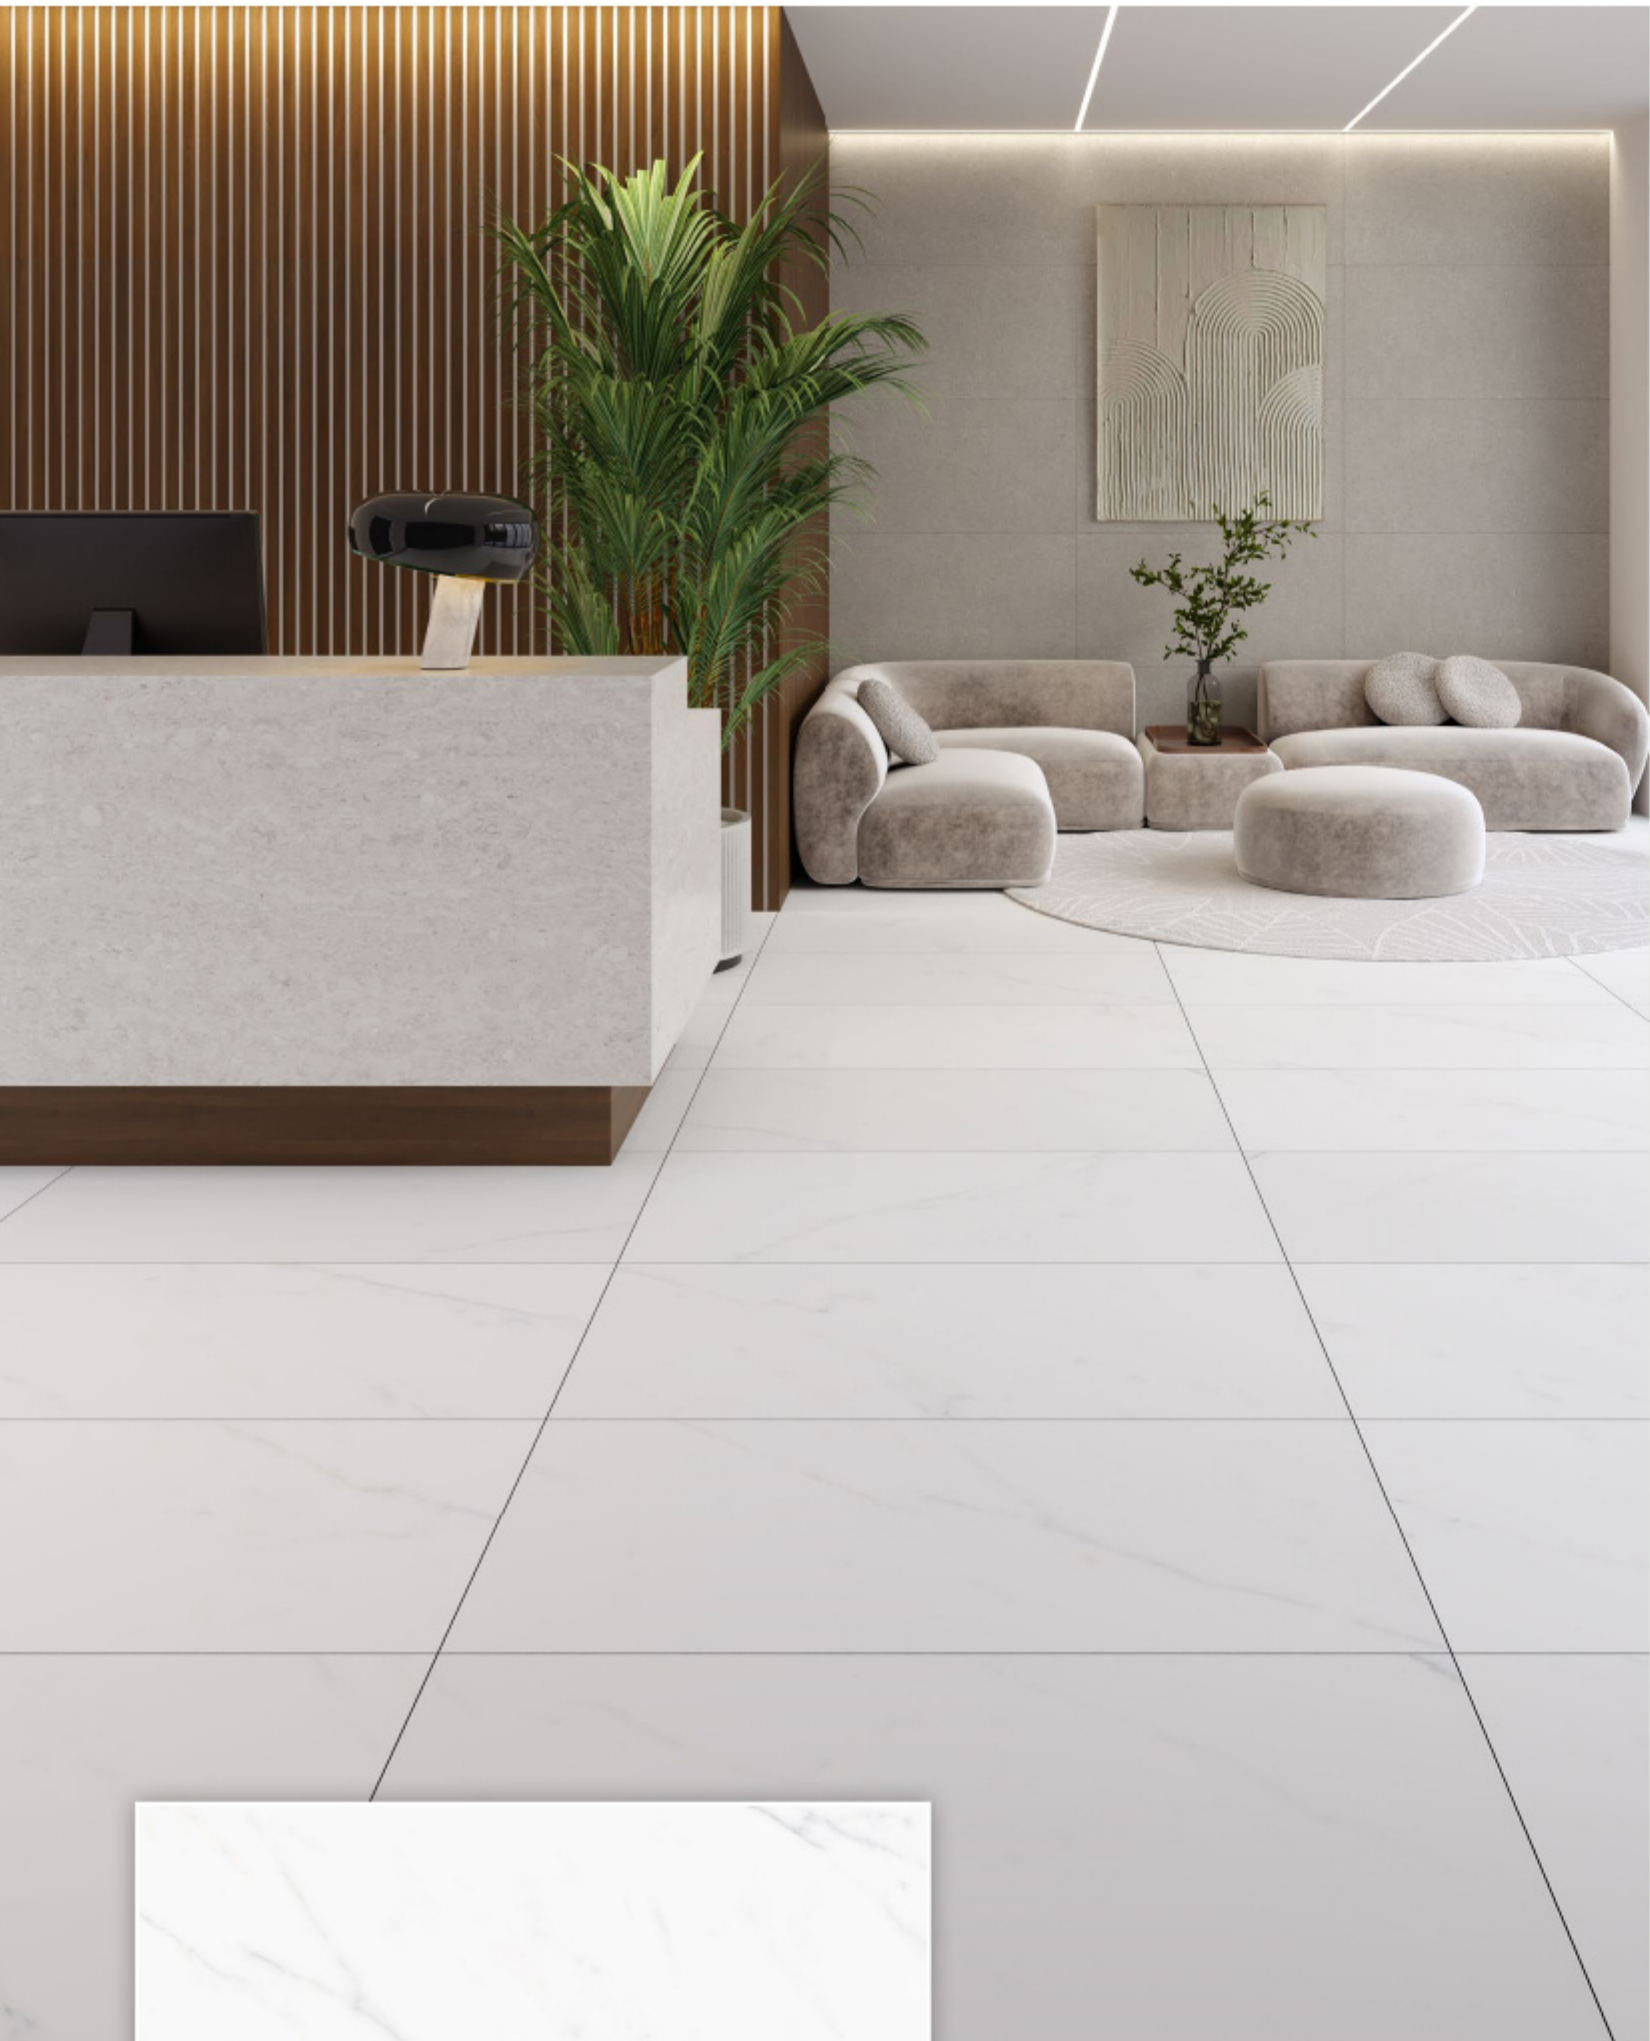

## FICHA TÉCNICA

### Technical Data Sheet

Mármol en acabado mate  
Matte marble finish

60 X 120 CM.  
24 X 48 IN.

Porcelanato esmaltado. Rectificado.  
Glazed porcelain tile. Rectified.



12 Caras  
12 Faces



Alto Tráfico  
High Traffic



Variación Alta  
High Variation



Pasta Blanca  
White body

### Uso Usage



Interior  
Interior



Baño  
Bathroom



Cocina  
Kitchen



Exterior  
Exterior



Comercial  
Commercial

**Porcelanato mate** / Matte porcelain tile

**Características técnicas** / Technical specifications

	Pasta blanca / White body		
	Separación de boquilla / Grout size	2 mm	
	PEI	4	
	Resistencia química / Chemical resistance	Conforme	ASTM C650
	DCOF / Dynamic Coefficient of Friction	>0.42	ASTM C1028
	Absorción de agua / Water absorption	≤0.5%	ASTM C373
	MOHS	5-8	ASTM C1028
	Resistencia de flexión / Breaking strength	>350 kg	ISO 10545-4
	Shock térmico / Thermal shock resistance	Conforme	ASTM C484
	Resistencia a helada / Frost resistance	Conforme	ASTM C1026
	Resistencia a manchas / Stain resistance	Conforme	ASTM C1378
	Resistencia de abrasión / Abrasion resistance	Conforme	ANSI A137

	Información de Embalaje	PZS-CAJA / PCS-BOX	M <sup>2</sup> -CAJA / FT <sup>2</sup> -BOX	KG-CAJA / LBS-BOX
		2	1.44 / 15.50	29.85 / 65.80