


Sizes & Formats

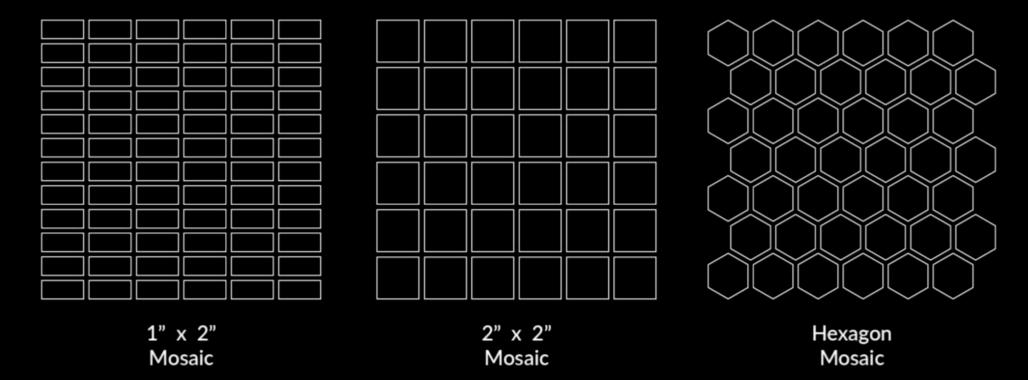

Thickness: 6mm

- 1" x 2" (2.4cm x 4.8cm) tiles meshed into 11.8" x 11.8" (30cm x 30cm) sheets
- Square mosaic: 2" (4.8cm) tiles meshed into 12" x 12" (30cm x 30cm) sheets
- Hexagon mosaic: 2" (5.1cm) tiles meshed into 11.2" x 12.8" (28.4cm x 32.4cm) sheets

Recommended Applications

- Shower: Wall and Floor
- Steam: Wall and Floor
- Light Commercial: Wall and Floor
- Medium Commercial: Wall and Floor
- Heavy Commercial: Wall and Floor
- Indoor: Wall and Floor

Recommended applications do not include consideration of any technical installation requirements or safety standards for slopes and pool decks. All tile products and setting materials should be selected and installed in compliance with manufacturers specifications and applicable use standards.

Technical Specifications

- V Rating (variation): V2 Slight Variation
- Breaking Strength (ISO 10545-4): —
- Resistance to Deep Abrasion (ISO 10545-6): —
- Resistance to Surface Abrasion (ISO 10545-7): —
- Slip Resistance: DCOF > 0.55
- Frost Resistance (ISO 10545-12): Yes
- Ecotile: No
- Number of Faces: —
- Moisture Rating (MR): 1- Impervious
- MOHS (Hardness Scale): —
- **PEI** (Wear): —
- Pacista Resistance Recycled Content: —